

(注) 『TB式共柄ポンプ』は、当社の商標（製品名）です。

Technical drawing of a mechanical assembly, likely a pump or valve mechanism, showing a side view with dimensions and numbered components.


Dimensions:

- a : Vertical distance from the top of the main body to the center of the pivot point.
- b : Vertical distance from the bottom of the main body to the center of the pivot point.
- c : Vertical distance from the bottom of the main body to the base of the lever arm.
- d : Horizontal distance from the center of the pivot point to the base of the lever arm.
- e : Length of the lever arm from the pivot point to the end.

Numbered Components:

- 1: Main body housing.
- 2: Lever arm.
- 3: Flange or base plate.
- 4: Vertical support or guide.
- 5: Internal component, possibly a valve or piston.
- 6: Base plate or mounting flange.
- 7: Bottom support or base.
- 2B: Pivot point of the lever arm.
- 3B: Bolt or fastener.
- 4B: Bolt or fastener.
- 7B: Bolt or fastener.

(注) 台板はねじ下の下に取り付けます。

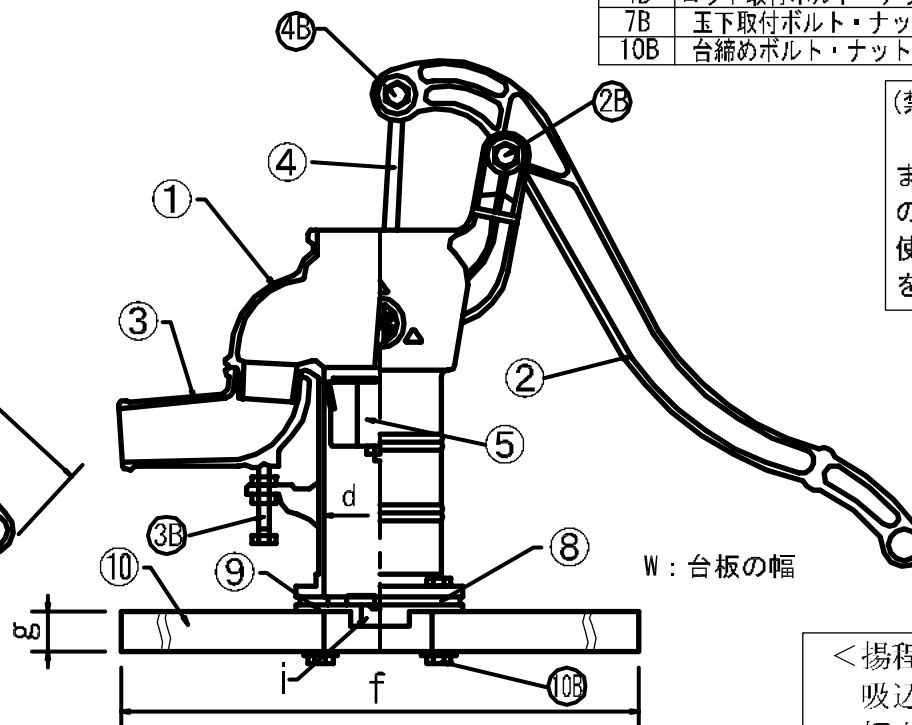

W : 台板の幅

この図面は、当社製品の承認
または販売購入を目的とするも
ので、それ以外の目的をもって
使用または閲覧・複写すること
を禁じます。

井戸水等 (常温0℃~40℃)

部番	部品名	材 質	備 考
1	本 体 (ツツ)	FC150	
2	ハンドル	FC200	
3	水 口	FC150	
4	ロット(押金)	SS400	ユニクロメッキ M10
5	木玉皮付	木+皮革	
4+5	ピストン		
6	合ゴム	N R	
7	玉下(改良バルブ)	FC200+NR	
8	ライト弁	N R	
9	ねじ下 (下次)	FC200	
10	台板	木+表面処理	
2B	ハンドル取付ボルト・ナット	SS400	ユニクロメッキ M12
3B	水口固定ボルト・ナット	SS400	ユニクロメッキ M10
4B	ロット取付ボルト・ナット	SS400	ユニクロメッキ M10
7B	玉下取付ボルト・ナット	SS400	ユニクロメッキ M10
10B	台締めボルト・ナット	SS400	ユニクロメッキ M10

製 品 名	型番	サイズ		a	b	c	d	e	f	g	w	i
		口径・径	玉下・下次の管径									
32(サニ-) 共柄ポンプ(打込タイプ)	T32U	3寸2分	32A(1 1/4B)	80	305	45	96	608				Rc1 1/4B
35(サニ-) 共柄ポンプ(打込タイプ)	T35U	3寸5分	40A(1 1/2B)	80	335	50	106	678				Rc1 1/2B
32(サニ-) 共柄ポンプ(台付タイプ)	T32D	3寸2分	32A(1 1/4B)	80	305		96	608	765	45	175	Rc1 1/4B
35(サニ-) 共柄ポンプ(台付タイプ)	T35D	3寸5分	40A(1 1/2B)	80	335		106	678	765	45	175	Rc1 1/2B

RcはPTねじ 単位：mm

承認	検図	製図	設計	作成月日	尺度	製品名(型番)		図面番号	東邦工業株式会社 TOHO INDUSTRY CO., LTD	
溝口			溝口		NON	三角法	共柄ポンプ(打込タイプ・台付タイプ)	T-H1606		